


# QUICK LOCK CONNECTORS

Designed to grip stripped wire at two (2) places to prevent slipping off. Available for up to 8 wires.

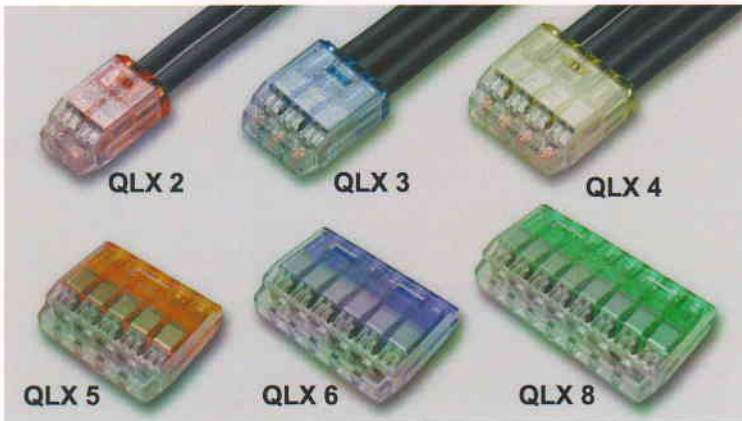

## MATERIALS


- SPRING ... STAINLESS STEEL
- CONNECTOR CONTACTS ... OXYGEN FREE COPPER
- HOUSING ... POLYCARBONATE




## FOR SAFETY USE

Please observe instructions to prevent over heating and possible fire


- Strip length Use the strip gauge on the product.




- Straighten the wire



- Insert a wire straight to the end
- Insufficient wire insertion causes over-heating

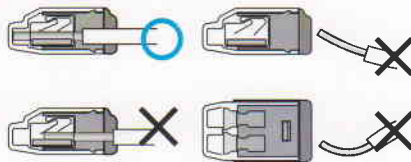

- Do not bend wires right after the QLX connector.

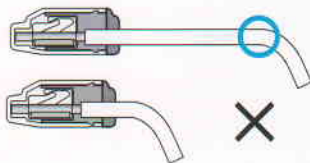


- To remove wire, pull out, twisting QLX connector.
- Strip the wire again when QLX connector is reused.



## PERFORMANCE:

Voltage—600V maximum.  
Building wire: 1000V maximum, signs and luminaires.  
Flammability—V2

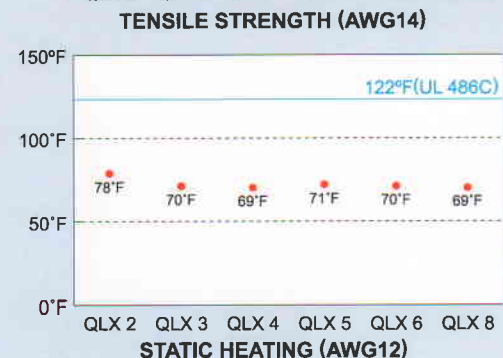

PART NUMBER	POLE	DIMENSIONS			RATINGS	STD QTY/BOX	APPLIED WIRE	COLOR
		LENGTH	WIDTH	HEIGHT				
QLX 2	2	20.5	11.6	9.1	20A 600V	COPPER/ SOLID WIRE AWG14 AWG12	Red Translucent	
QLX 3	3		16.2				Blue Translucent	
QLX 4	4		20.8				Yellow Translucent	
QLX 5	5		25.4				Orange Translucent	
QLX 6	6		30.0				Purple Translucent	
QLX 8	8		39.2				Green Translucent	